



CUSTOMER DATA: _____
 SERIES AND MODEL: _____ INSTALLER DATA: _____
 FITTINGS COLOR: _____
 GLASS COLOR: _____

| MOUNTING PROFILES: | | L | R |
|---------------------------------|--|--------------------------|--------------------------|
| COMPLIES WITH SERIES AND MODELS | | <input type="checkbox"/> | <input type="checkbox"/> |
| OTHER: | | <input type="checkbox"/> | <input type="checkbox"/> |
| OTHER: | | <input type="checkbox"/> | <input type="checkbox"/> |

MEASUREMENT METHODS:

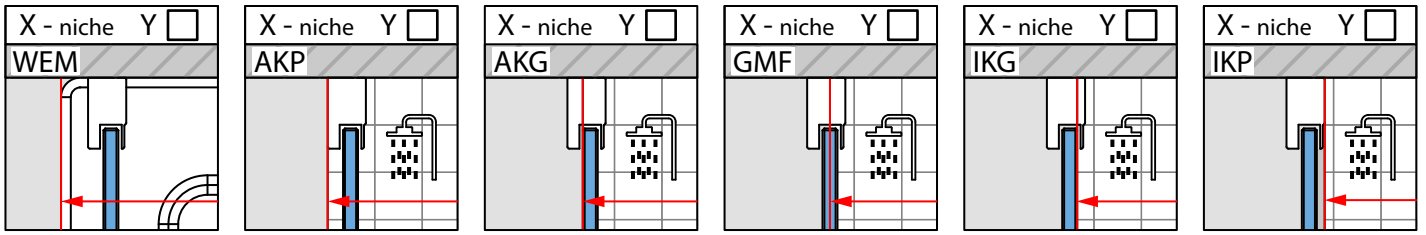

MAIN DRAWING

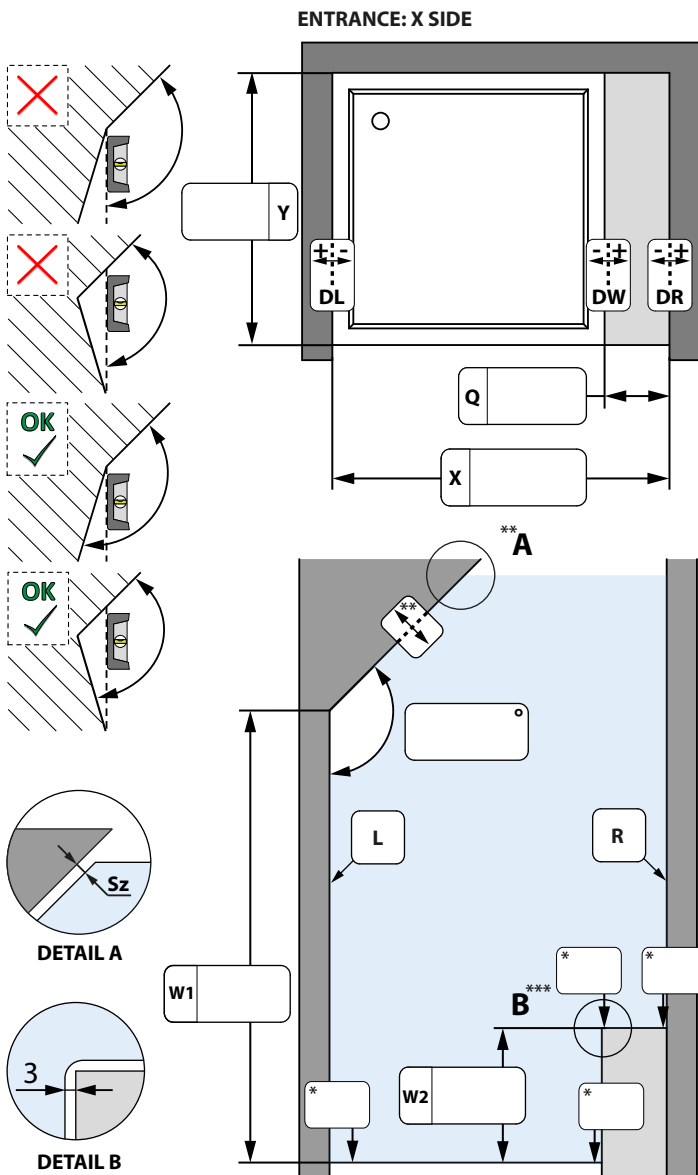

CONSTRUCTION HEIGHT AT "0" POINT:


STANDARD

OTHER:

MEASURE AND GIVE DEVIATIONS: (A BLANK FIELD MEANS NO DEVIATION)

DL + - 0
 DW - + 0
 DR - + 0

CHOOSE THE VARIANT OF THE LAYOUT:

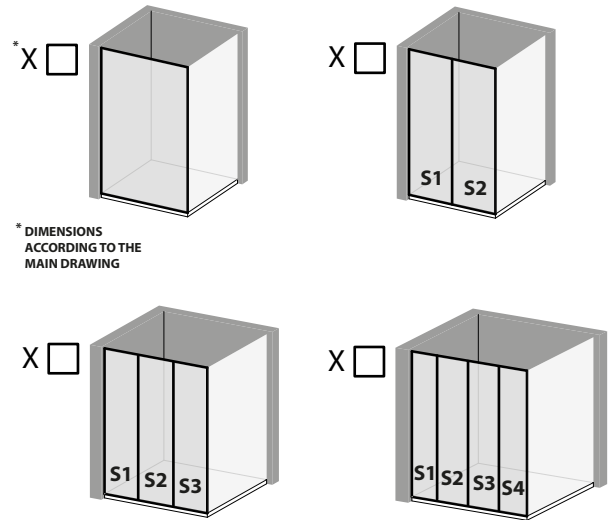

* DIMENSIONS ACCORDING TO THE MAIN DRAWING

GIVE DIMENSIONS AND METHOD OF INTERPRETATION:

| X | |
|----|--|
| S1 | |
| S2 | |
| S3 | |
| S4 | |

* INDICATE "0" POINT(S) AND SEPCIFY DEVIATION(S) AS A NEGATIVE VALUE
 POINT(S) "0" IS/ARE THE HIGHEST POINT(S) ON THE FLOOR / SHOWER TRAY / L-SHAPE WALL
 ** CHECK THE FLATNESS OF THE CEILING AND DESCRIBE ANY CURVES. STANDARD SZ IS 4 MM FOR FIXED PARTS, 10 MM FOR SINGLE DOORS, 15 MM FOR BIFOLD DOORS, CONSIDER INCREASING THE GAP.
 *** CHECK THE FLATNESS AND DESCRIBE ANY CURVES. STANDARD GAP IS 3 MM, CONSIDER INCREASING IT.

 ATTENTION, RADAWAY, FOR TECHNOLOGICAL REASONS, RESERVES THE POSSIBILITY OF MAKING CONSTRUCTION CHANGES.

REMARKS: _____