
CUCTOMED DATA.		MOUNTING PROFILES:	L R
CUSTOMER DATA:		COMPLIES WITH SERIES AND MODELS	
SERIES AND MODEL:	INSTALLER DATA:	OTHER:	
FITTINGS COLOR:			
GLASS COLOR:		OTHER:	
MEASUREMENT METHODS:			
X - niche Y X - niche Y AKP	X - niche Y X - niche Y GMF	X - niche Y X - niche IKP	Y


MAIN DRAWING

ENTRANCE: X SIDE

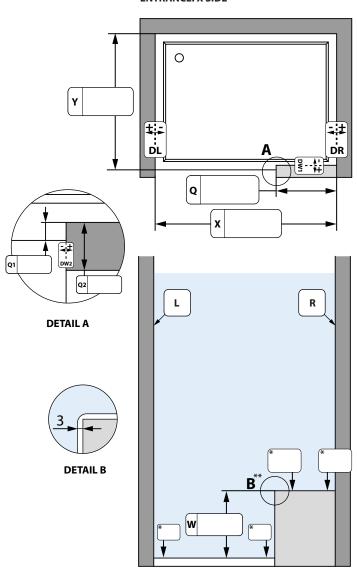


CONSTRUCTION HEIGHT AT "0" POINT:

MEASURE AND GIVE DEVIATIONS: (A BLANK FIELD MEANS NO DEVIATION)



CHOOSE THE VARIANT OF THE LAYOUT:



GIVE DIMENSIONS AND METHOD OF INTERPRETATION:

	Х
S1	
S2	
S3	
S4	

 $^{^{\}star\star}$ CHECK THE FLATNESS AND DESCRIBE ANY CURVES. STANDARD GAP IS 3 MM, CONSIDER INCREASING IT.



ATTENTION, RADAWAY, FOR TECHNOLOGICAL REASONS, RESERVES THE POSSIBILITY OF MAKING CONSTRUCTION CHANGES.

REMARKS:

^{*}INDICATE "0" POINT(S) AND SEPCIFY DEVIATION(S) AS A NEGATIVE VALUE POINT(S) "0" IS/ARE THE HIGHEST POINT(S) ON THE FLOOR / SHOWER TRAY / L-SHAPE WALL