


CUSTOMER DATA: \_\_\_\_\_  
 SERIES AND MODEL: \_\_\_\_\_ INSTALLER DATA: \_\_\_\_\_  
 FITTINGS COLOR: \_\_\_\_\_  
 GLASS COLOR: \_\_\_\_\_


MOUNTING PROFILE:	<input type="checkbox"/>	<input type="checkbox"/>
COMPLIES WITH SERIES AND MODELS	<input type="checkbox"/>	<input type="checkbox"/>
OTHER:	<input type="checkbox"/>	<input type="checkbox"/>
OTHER:	<input type="checkbox"/>	<input type="checkbox"/>

MEASUREMENT METHODS:

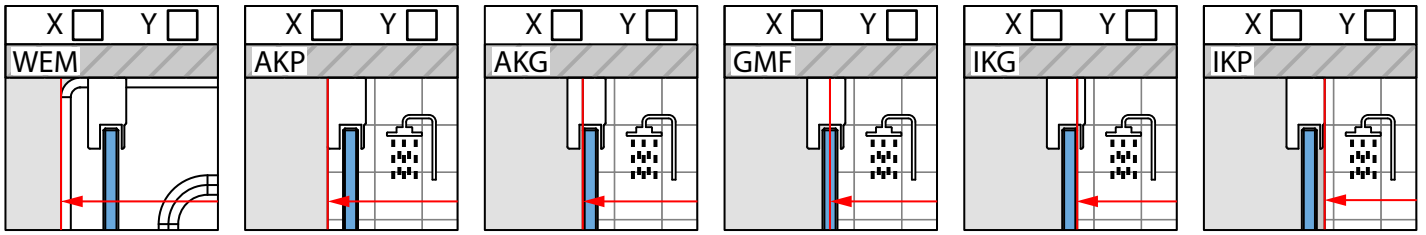

MAIN DRAWING


ENTRANCE: SIDE "X"

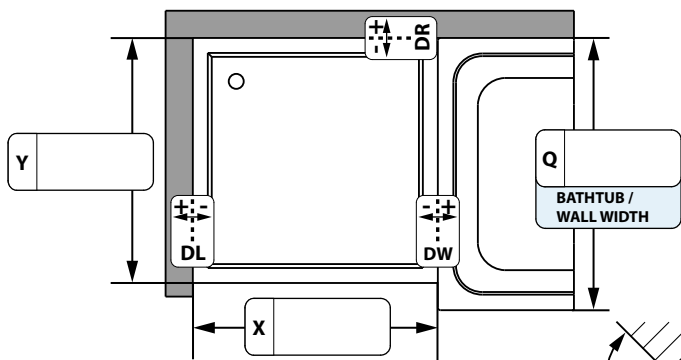


CONSTRUCTION HEIGHT AT "0" POINT:

STANDARD  OTHER: .....

MEASURE AND GIVE DEVIATIONS (A BLANK FIELD MEANS NO DEVIATION)

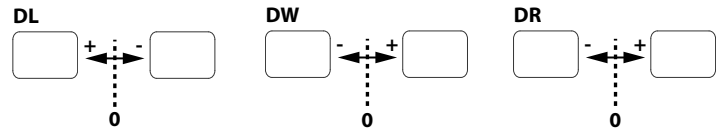



CHOOSE THE VARIANT OF THE LAYOUT OF THE BUILDING WALLS FOR X AND Y:

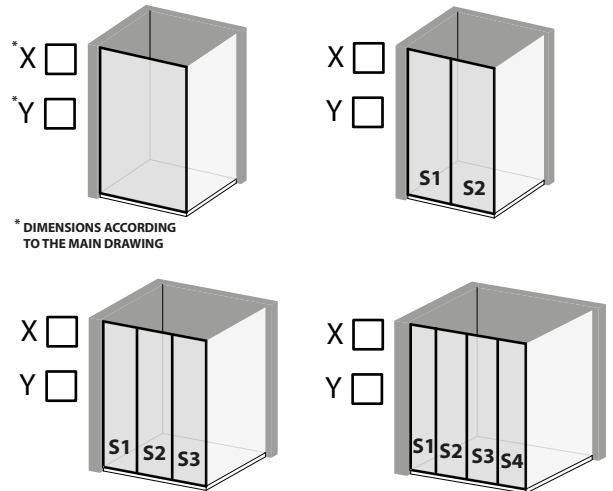

\* DIMENSIONS ACCORDING TO THE MAIN DRAWING

GIVE DIMENSIONS AND METHOD OF INTERPRETATION:

	X	Y
S1		
S2		
S3		
S4		

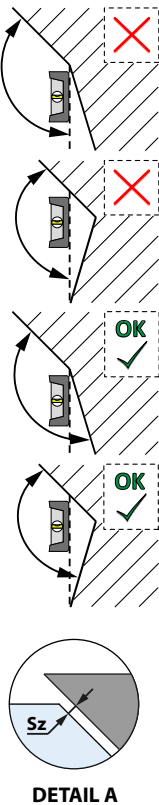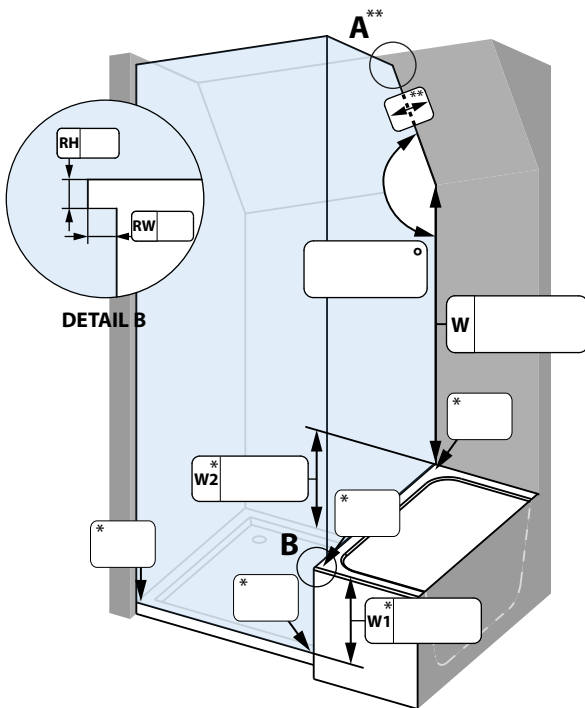

\* INDICATE "0" POINT(S) AND SEPCIFY DEVIATION(S) AS A NEGATIVE VALUE  
 POINT(S) "0" IS/ARE THE HIGHEST POINT(S) ON THE FLOOR / SHOWER TRAY / L-SHAPE WALL  
 \*\* CHECK THE FLATNESS OF THE CEILING AND DESCRIBE ANY CURVES. STANDARD IS 4 MM FOR FIXED PARTS,  
 10 MM FOR SINGLE DOORS, 15 MM FOR BIFOLD DOORS, CONSIDER INCREASING THE GAP.

 ATTENTION, RADAWAY, FOR TECHNOLOGICAL REASONS, RESERVES THE POSSIBILITY OF MAKING CONSTRUCTION CHANGES.

REMARKS: \_\_\_\_\_